
## BATTERY POWERED

HSDC

DIGITAL HANGING SCALE

NO MORE RECHARGING, EASILY REPLACED BATTERIES

LOBAT



 Optional Stainless Steel Produce Pan -Makes it ideal for supermarkets or produce and fruit stands.

 Sleep Mode & Auto Shutoff -Prolongs battery life.

time during recharging!

· Full Featured Push Button Tare

The Cardinal Series HSDC battery powered electronic hanging scale redefines the meaning of portable weighing. Other portable electronic scales operate on their built-in power sources for short periods of time, then have to be removed from service to have batteries charged. Not so with Cardinal's HSDC hanging scale! With our digital hanging scale, just remove the back cover panel, remove old batteries and replace them with new ones. In 10 minutes or so you're back weighing again. It couldn't be easier!



Rugged, but lightweight construction makes it easy to move from place to place. Just hang it up, place the item to be weighed on the hook or in the optional produce pan, and with electronic speed and accuracy, weight is displayed on a large 1" tall LCD digital readout. Easily read at a distance, even in direct sunlight.




## HSDC BATTERY POWERED DIGITAL HANGING SCALE

## The Ideal Hanging Scale When You Need Digital Accuracy


The Cardinal HSDC is a full featured, battery powered hanging scale that incorporates push button tare, a sleep mode, and an auto shutoff mode to prolong battery life. Its aluminum alloy construction makes it lightweight and easy to use, but tough enough to stand up under conditions required o any portable hanging scale. And, it goes where you want it! - where you need it!

Whether an industrial application, a curbside or site collection operation for recycling or a supermarket, the HSDC series hanging scale is the true example of accurate portable weighing.

If you have been "hanging" around for a portable scale that goes where you need it, then now's the time to "hook up" with a Cardinal HSDC digital hanging scale!



Batteries can be changed easily in minutes.

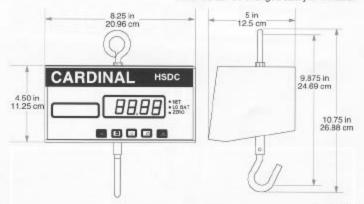

Overall height of HSDC with produce pan is 34.75"

l	woder	Capacity	Graduation
ĺ	HSDC-20	20 lb	.01 lb
١	HSDC-50	50 lb	.02 lb
	HSDC-100	100 lb	.05 lb
	*HSDC-200	200 lb	0.1 lb
	HSDC-500	500 lb	0.2 lb

20 kg

50 kg

.01 kg

.02 kg

.05 kg

100 kg \* These scales meet all requirements of Handbook 44, issued by the National Institute of Standards and Technology and has been issued the Certificate of Conformance Number 94-03.

HSDC-20K

HSDC-50K

\*HSDC-100K

Features and Specifications	ON CONT	ΚŢ	
Display Type	1" high LCD	اد	
Power	6 "C" size alkaline	WU	
Scale Weight	5 lb (10 lb with optional pan)		
	10' to +40' C/+14' to +104' F		
Zero	Established during setup and m	naint	
	automatically to ± 1/4 graduation		
Auto Zero Range	5 and 0 through 9 graduations		
Calibration Mathead	District I and the second		

2010	automatically to ± 1/4 graduation
Auto Zero Range	
Calibration Method	
	stored in non-volatile memory
Tare	Push button, full scale
Annunciators	
Controls	On/zero, gross, tare, net, off
Auto Shut Off	
Sample Rate	1-12 samples per second, selectable
Optional Stainless Steel Produce Pan	

(available for 20 lb scales only) volumetric capacity